



CHANG IRON GROUP

FLAIR

撓性聯軸器

SUPER FLEXIBLE COUPLINGS

- 採用高材質粉末冶金原料，可承受更高的瞬間扭力。
 - 採用複合橡膠材質，具有耐磨耗、耐熱、防油氣的特性，確保傳動順暢，延長傳動壽命。
 - 大幅抑制運轉噪音。
 - 輪轂外周經精密加工，安裝便利，對心容易。
- Manufactured from high quality powder metallurgy material to withstand more sudden torque changes.
 - High quality composite rubber is employed, featuring superior friction and heat resistance, oil-proof and gas-proof. It ensures a smooth transmission effect and long service life.
 - Low running noise.
 - The hub surface is precisely machined for convenient mounting and centering.




全系列產品均經英國 SGS 協會審核通過 ISO-9001 國際品質認證

規格 / Specifications:


單位 / Unit: mm

型號 Model No.	中心小孔 Centre bore (A)	容許孔內(H)直徑 Bore diameter		連軸爪數 Teeth	本體宅徑 Boss diameter (B)	本體外徑 diameter (C)	宅徑高度 Boss height (F)	單邊高度 One side height (D)	整組高度 All height (E)	單邊 重量 kg	整組淨重 Net kg
		最小值 Min.	最大值 Max.								
L-035	0	3.175	9	2	16	16	—	7	21	0.01	0.03
L-050	6.35	6.35	16	2	28	28	—	15.5	43	0.06	0.13
L-070	6.35	6.35	19	2	35	35	—	19	51	0.11	0.24
L-075	7.94	7.94	24	3	45	45	—	21	54	0.19	0.41
L-090	7.94	7.94	26	3	54	54	—	22	55	0.31	0.64
L-095	11.1	11.1	28	3	54	54	—	25	64	0.37	0.75
L-099	11.1	11.1	32	3	65	65	—	27	73	0.58	1.19
L-100	12.7	12.7	36	3	65	65	—	35	89	0.73	1.5
L-110	15.8	15.8	42	3	84	84	—	43	108	1.49	3.1
L-150	19.05	19.05	48	3	80	96	30	45	115	1.62	3.4
L-190	22.22	22.22	54	3	102	115	34	54	124	3.8	7.8
L-225	38	38	66	3	108	127	35	64	154	5.3	10.8

L-035 ~ L-110

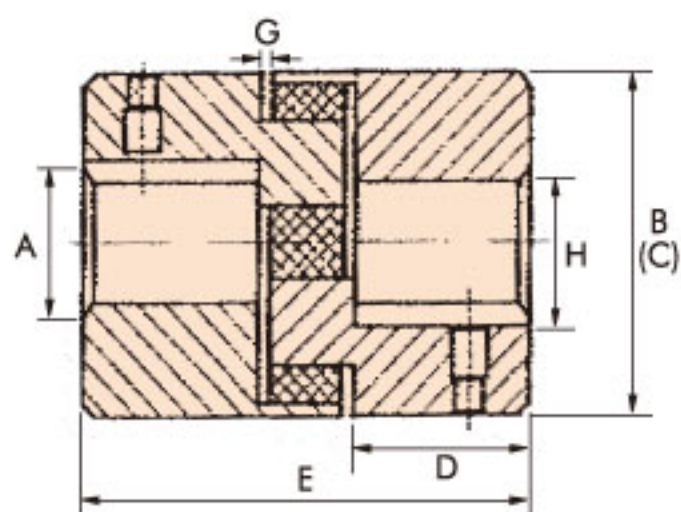

L-150 ~ L-225

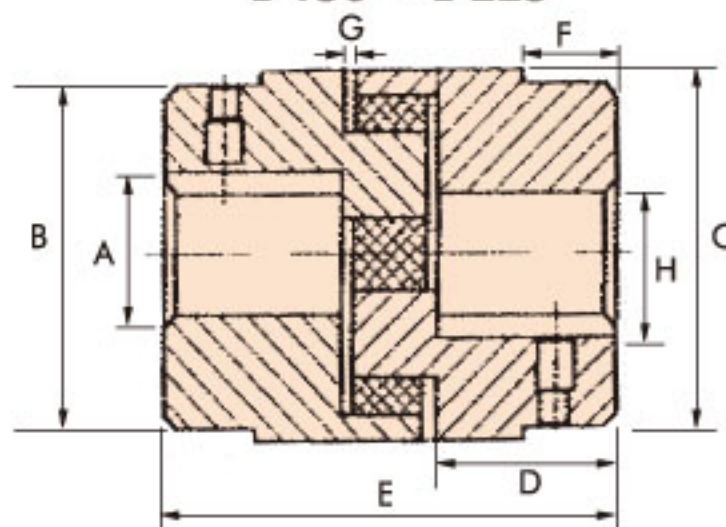

型號 Model No.	扭力值 Torque		最高轉速 Max. R.P.M.	二軸允許公差值 Permissive tolerance between shafts			慣性力矩 GD ² value for kg-cm ²
	建議正常扭力值 Normal kgm	最大扭力值 Max. kgm		軸向公差(G) Axial	徑向公差 Radial	角度公差 Angle	
L-035	0.05	0.15	20,000	±0.5	±0.1	1°	0.1
L-050	0.3	0.9	15,000	±0.5	±0.1	1°	0.5
L-070	0.5	1.5	12,000	±0.5	±0.2	1°	1.9
L-075	1.0	2	10,000	±0.6	±0.2	1°	5.2
L-090	1.6	3.2	9,000	±0.6	±0.2	1°	11.5
L-095	2.2	4.4	8,000	±0.7	±0.3	1°	17
L-099	4	8	7,000	±0.7	±0.3	1°	29
L-100	5	10	6,000	±0.8	±0.3	1°	39.8
L-110	9	18	5,000	±0.8	±0.4	1.2°	133
L-150	15	30	4,500	±1	±0.4	1.2°	232
L-190	20	50	4,000	±1	±0.4	1.5°	565
L-225	30	60	3,400	±1.2	±0.5	1.5°	1384

本公司產品不斷精進、若有任何變更、恕不另行通知。

To ensure technological excellence, specifications are subject to change without prior notice.



經銷商 / Distributed by: